


## OSHFA01 Module

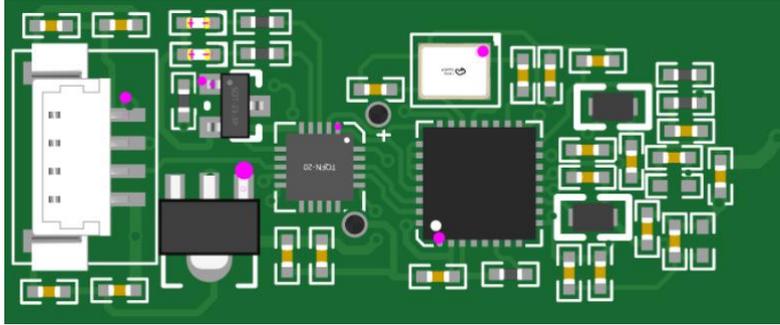

Communication interface	UART TTL232 (9600-115200bps) 5V
Power	5V max 100mA (related requirements for reading distance)
Protocols	ISO/IEC 14443A (MF1 S50、MF1 S70、Ntag21x)
Read/write speed	106kbit/s 212kbit/s 424kbit/s
Read range	Up 0 to 50 mm
<b>Built-in (Optional accessories)</b>	
Buzzer	Active
Illuminated indicator	2 (red, green)
Housing	None
Size	35mm (L) x15mm (W) x 8mm (H)
Weight	3g
Waterproof	Optional IP grade (except for 4P sockets).
Operating temperature	-20°C – 85°C